

WAAS CH 87030 W13A	APP CRS 135°	Rwy Idg TDZE Apt Elev	5000 1203 1204
---------------------------------	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ARTHUR N NEU (CIN)



▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting and increase all DA 62 feet and all MDA 80 feet and increase LNAV/VNAV all Cats visibility and LNAV Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct COHGI and hold.

AWOS-3 118.025	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

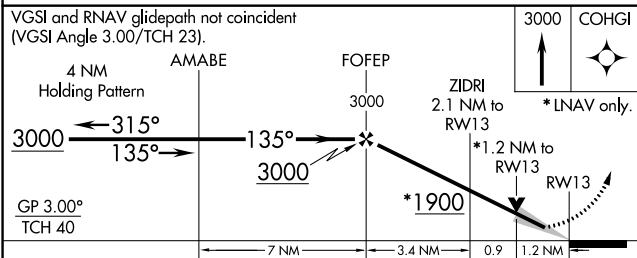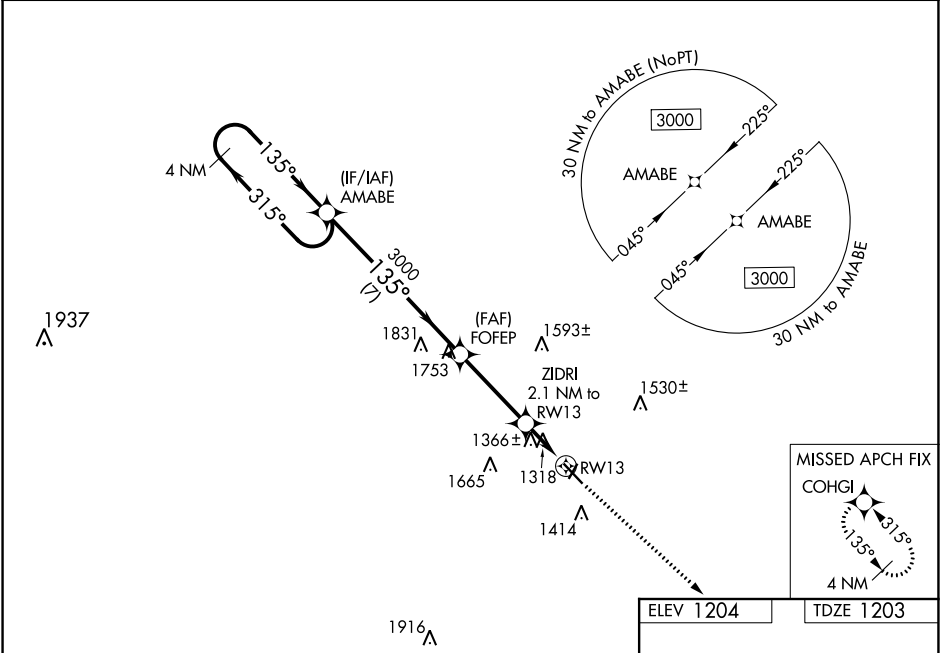

CATEGORY	A	B	C	D
LPV DA	1453-1	250 (300-1)		NA
LNAV/VNAV DA	1607-1 $\frac{3}{8}$	404 (500-1 $\frac{3}{8}$)		NA
LNAV MDA	1620-1	417 (500-1)	1620-1 $\frac{1}{8}$ 417 (500-1 $\frac{1}{8}$)	NA
CIRCLING	1720-1	516 (600-1)	1720-1 $\frac{1}{2}$ 516 (600-1 $\frac{1}{2}$)	NA

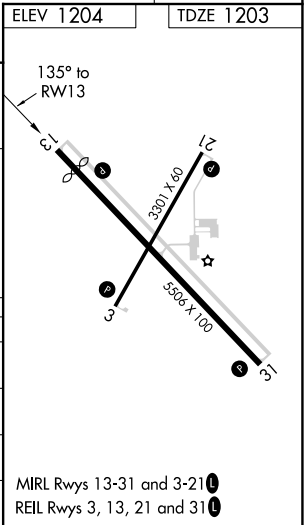

NC-3, 03 DEC 2020 to 31 DEC 2020

NC-3, 03 DEC 2020 to 31 DEC 2020