

WAAS CH 97623 W15A	APP CRS 151°	Rwy ldg 4500 TDZE 45 Apt Elev 47
--	------------------------	---

RNAV (GPS) RWY 15

NANTUCKET MEMORIAL (ACK)



RNP APCH.

▼

Baro-VNAV NA when using Hyannis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Rwy 15 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hyannis altimeter setting and increase LPV DA to 358, LNAV/VNAV DA to 543, and all MDA 80 feet; increase LNAV/VNAV all Cats and LNAV Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 2300 direct DUPKE and hold.

ATIS 127.5	BOSTON APP CON ★ 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	CLNC DEL 119.375	UNICOM 122.95
----------------------	--	--	-------------------------	----------------------------	-------------------------

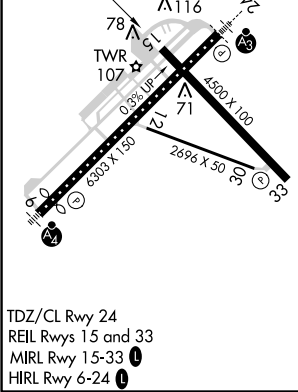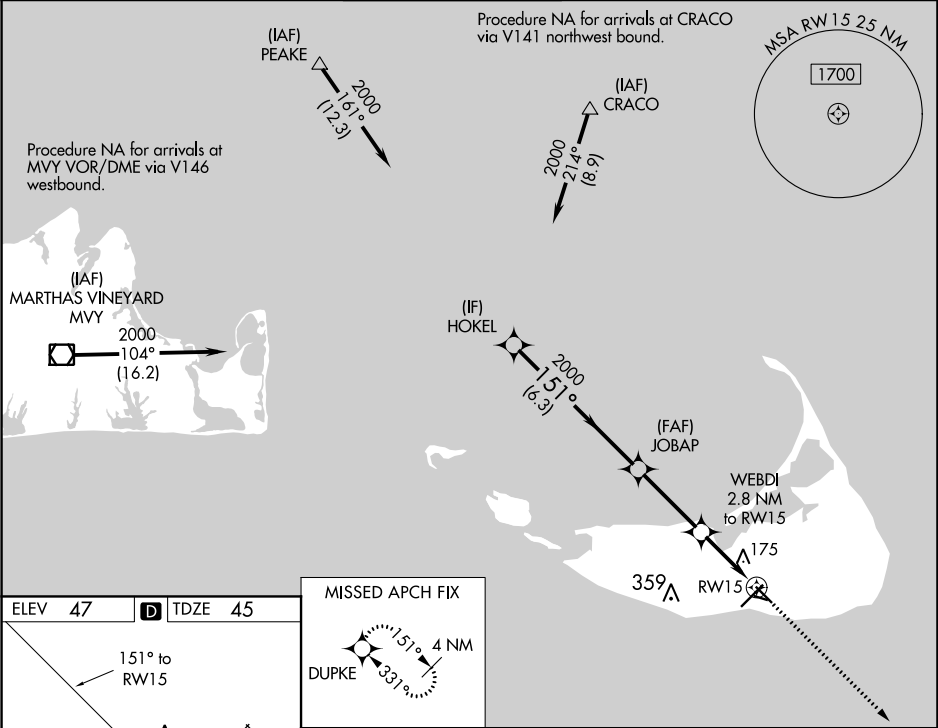

MISSED APCH FIX			
DUPKE 4 NM 151°/331°			
GP 3.00° TCH 45			
HOKEL 2000 JOBAP 2000 WEBDI 2.8 NM to RW15 RW15			
2000 151° 2000 *980			
6.3 NM 3.2 NM 2.8 NM			
CATEGORY	A	B	C D
LPV DA	295-1 250 (300-1)		
LNAV/VNAV DA	480-1½ 435 (500-1½)		
LNAV MDA	440-1 395 (400-1)		440-1⅛ 395 (400-1⅛)