RNAV (GPS) RWY 18

SMITH FIELD (SLG)

WAAS	APP CRS	Rwy Idg 4997
CH 90208	181°	TDZE 1191
W18A		Apt Elev 1191

Baro-VNAV NA when using Northwest Arkansas National altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Northwest Arkansas National altimeter setting, and increase all DA/MDA 40 feet, and increase LPV visibility ¼ mile all Cats, LNAV/VNAV visibility ¼ mile all Cats, and LNAV visibility Cat C and D ¼ mile.

MISSED APPROACH: Climb to 3200 direct CUVIT and hold.

AWOS-3PT	RAZORBACK APP CON ★	UNICOM
118.375	121.0 244.575	122.8 (CTAF) L

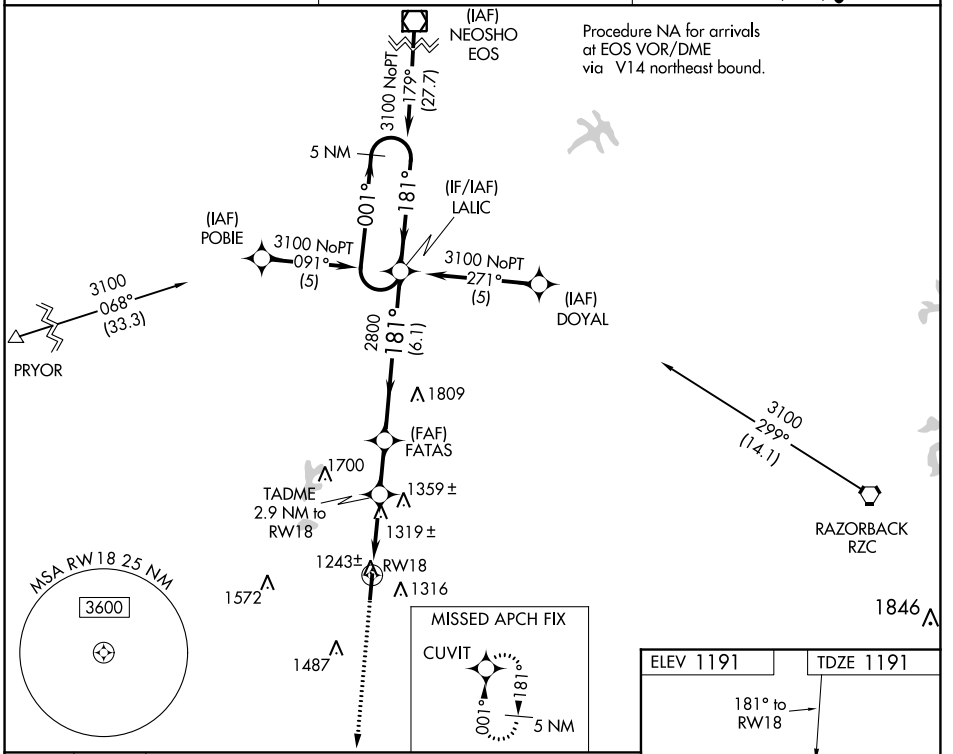

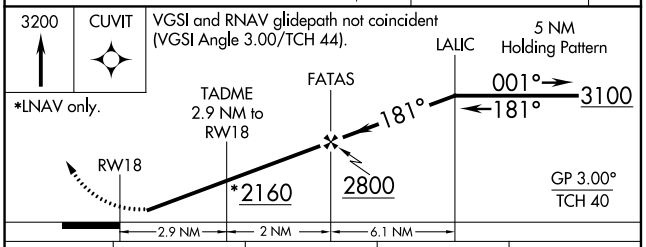

CATEGORY	A	B	C	D
LPV DA	1479-1 288 (300-1)			
LNAV/VNAV DA	1623-1½ 432 (500-1½)			
LNAV MDA	1580-1 389 (400-1)			1580-1¼ 389 (400-1¼)
CIRCLING	1620-1 429 (500-1)	1720-1 529 (600-1)	1720-1½ 529 (600-1½)	1760-2 569 (600-2)

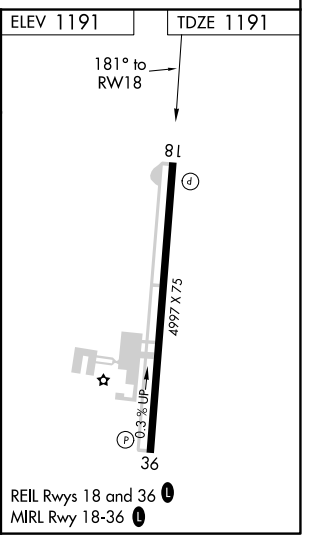

SC-1, 03 DEC 2020 to 31 DEC 2020
SC-1, 03 DEC 2020 to 31 DEC 2020