



WAAS CH <b>77835</b> <b>W33A</b>	APP CRS <b>331°</b>	Rwy Idg <b>4500</b> TDZE <b>41</b> Apt Elev <b>47</b>
--	------------------------	---

RNAV (GPS) RWY 33  
NANTUCKET MEMORIAL (ACK)

**⚠** Baro-VNAV NA when using Hyannis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). When local altimeter setting not received, use Hyannis altimeter setting: increase alt DA 63 feet and all MDA 80 feet; increase LNAV Cats C and D visibility  $\frac{1}{8}$  mile and Circling Cat C visibility  $\frac{1}{4}$  mile. DME/DME RNP: 0.3 NA.

**MISSED APPROACH:** Climb to 2500 direct CEROD and on track 260° to CLAMY and hold.

ATIS <b>127.5</b>	BOSTON APP CON★ <b>126.1 318.1</b>	NANTUCKET TOWER★ <b>118.3 (CTAF) 0</b>	GND CON <b>132.5</b>	CLNC DEL <b>119.375</b>	UNICOM <b>122.95</b>
----------------------	---------------------------------------	---	-------------------------	----------------------------	-------------------------

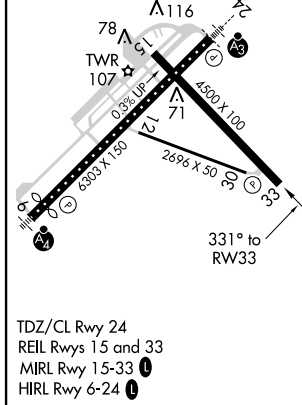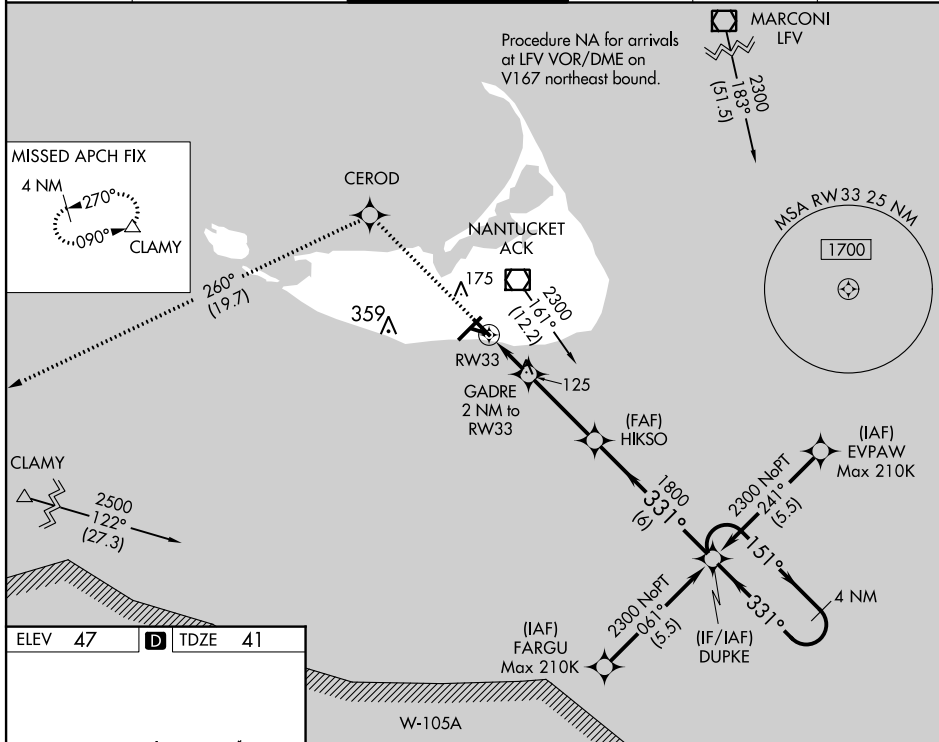

\* LNAV only.

GADRE  
2 NM to RW33

HIKSO  
1800

DUPKE

4 NM Holding Pattern

2300

151° →

← 331°

331°

RW33

\*720

1800

GP 3.00° TCH 56

2 NM    3.4 NM    6 NM

CATEGORY	A	B	C	D
LPV DA		291-1	250 (300-1)	
LNAV/VNAV DA		301-1	260 (300-1)	
LNAV MDA		380-1	339 (400-1)	
<b>C</b> CIRCLING	480-1 433 (500-1)	500-1 453 (500-1)	720-2 673 (700-2)	1000-3 953 (1000-3)

RNAV (GPS) RWY 33