
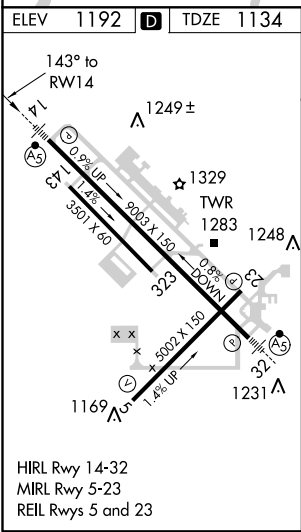


WAAS CH 49205 W14A	APP CRS 143°	Rwy Idg 9003 TDZE 1134 Apt Elev 1192
--	------------------------	---

RNAV (GPS) RWY 14

YOUNGSTOWN-WARREN RGNL (YNG)

RNP APCH. For inop ALS, increase LPV all Cats visibility to RVR 5000 and LNAV Cat D visibility to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. Circling Rwy 5 NA at night.		MALSR 	MISSED APPROACH: Climb to 2900 direct UNERE and hold.	
ATIS 123.75	YOUNGSTOWN APP CON ★ 133.95 322.3	YOUNGSTOWN TOWER 119.5 263.0	GND CON 121.9 275.8	CLNC DEL 118.25

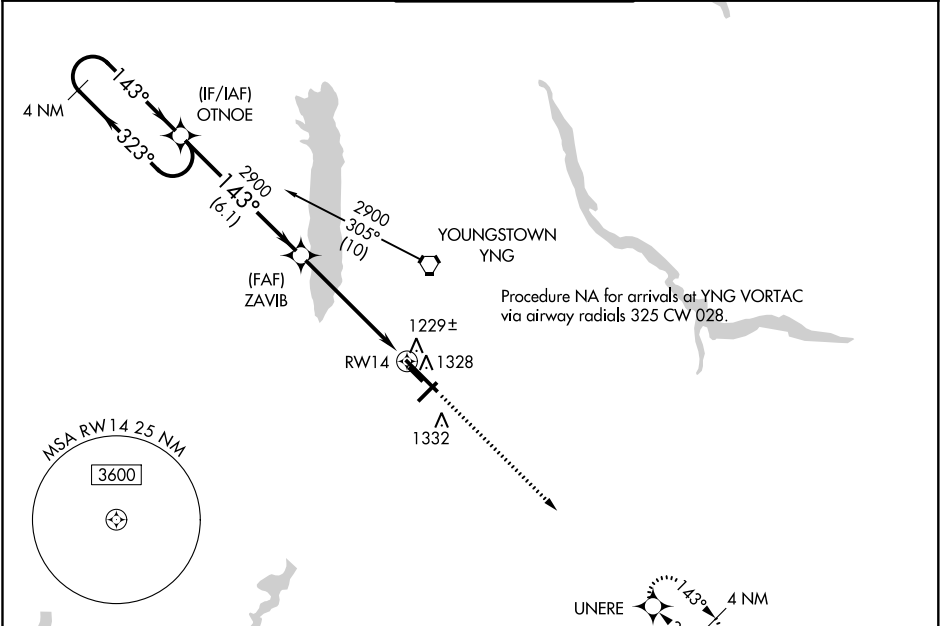

2537			
4 NM Holding Pattern		*LNAV only.	2900 UNERE
OTNOE		ZAVIB	
2900 ← 323° 143° →		143°	*1.2 NM to RWY 14
GP 3.00° TCH 57		2900	RWY 14
		6.1 NM	4.2 NM
CATEGORY	A	B	C
LPV DA	1384/24 250 (200-½)		
LNAV/VNAV DA	1499/40 365 (400-¾)		
LNAV MDA	1540/24	406 (400-½)	1540/40 406 (400-¾)
CIRCLING	1640-1 448 (500-1)	1660-1 468 (500-1)	1740-1½ 548 (600-1½)