

WAAS CH <b>77620</b> <b>W05A</b>	APP CRS <b>054°</b>	Rwy Idg TDZE <b>1199</b> Apt Elev <b>1228</b>
--	------------------------	---

RNAV (GPS) RWY 5

AKRON-CANTON RGNL(CAK)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.  
\*\* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct EGGII and on track 048° to ACO VOR/DME and hold.

ATIS <b>121.05</b>	CLEVELAND APP CON * <b>125.5 269.25</b>	AKRON-CANTON TOWER <b>134.75 279.575</b>	GND CON <b>121.7 348.6</b>	CLNC DEL <b>132.05</b>
-----------------------	--	---	-------------------------------	---------------------------

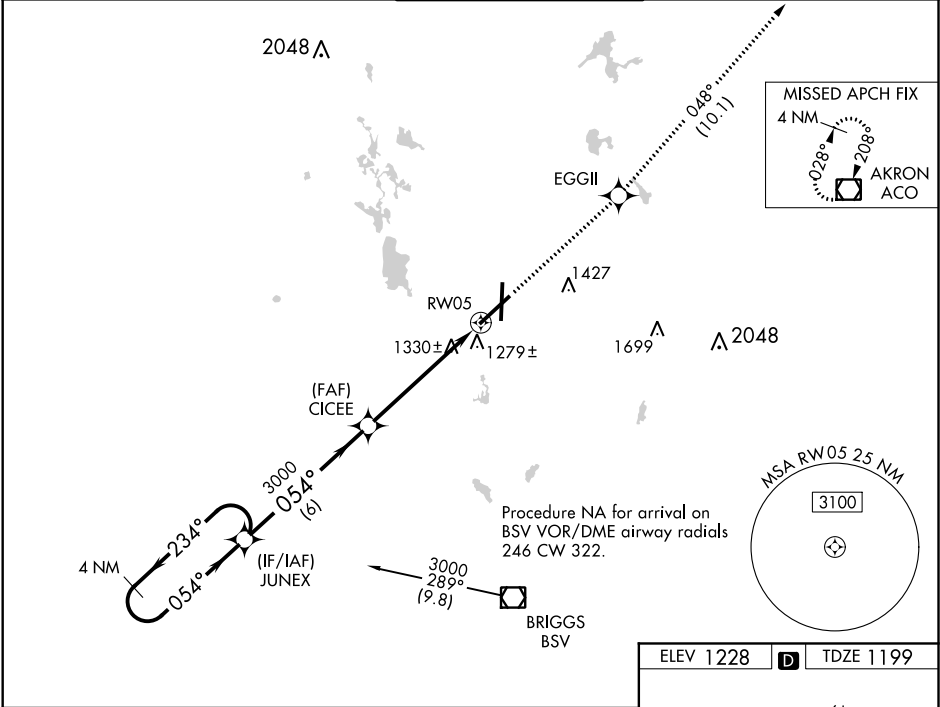

4 NM Holding Pattern				
CATEGORY	A	B	C	D
LPV DA	**1399/24		200 (200-½)	
LNAV/VNAV DA	1577/50		378 (400-1)	
LNAV MDA	1640/24	441 (500-½)	1640/40 441 (500-¾)	1640/50 441 (500-1)
CIRCLING	1760-1	532 (600-1)	1760-1½ 532 (600-1½)	1780-2 552 (600-2)

