

WAAS CH 77514 W30A	APP CRS 301°	Rwy Idg TDZE Apt Elev	7201 1286 1289
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30

HURON RGNL (HON)

RNP APCH.


▼

▲

When local altimeter setting not received, use Mitchell Muni altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cats C/D, and Circling Cats C/D visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). Baro-VNAV NA when using Mitchell Muni altimeter setting. Circling Rwy 17, 35 NA at night.

MISSED APPROACH: Climb to 3000 direct COGAC and on track 309° to HON VORTAC and hold.

ASOS 118.125	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 123.0 (CTAF) 1
------------------------	---	---------------------------------

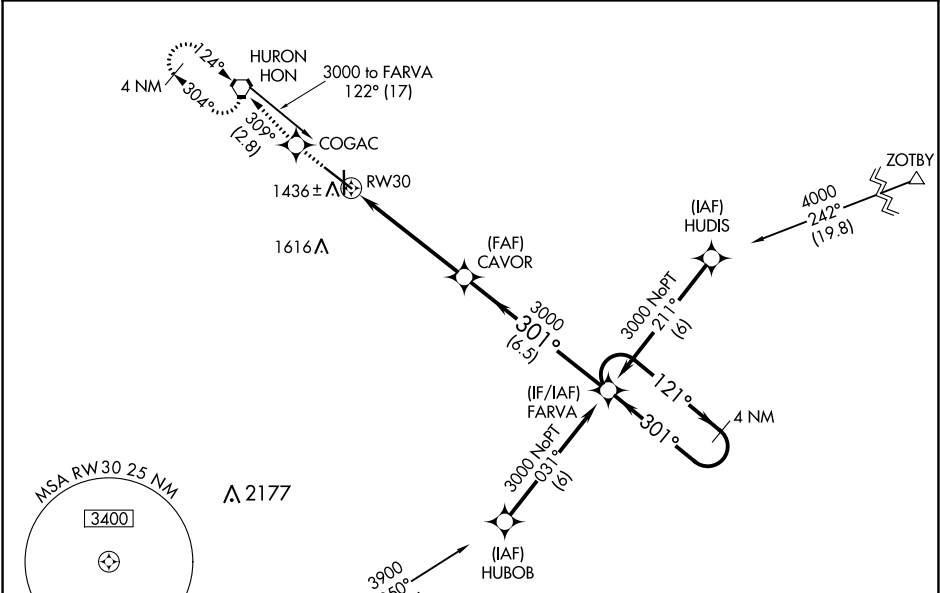

3000	COGAC	HON	CAVOR	FARVA	4 NM Holding Pattern
↑	✦	tr 309°	✦	✦	
CATEGORY	A	B	C	D	
LPV DA	1559-1 273 (300-1)				
LNAV/VNAV DA	1721-1½ 435 (500-1½)				
LNAV MDA	1760-1 474 (500-1)	1760-1¼ 474 (500-1¼)	1760-1½ 474 (500-1½)		
CIRCLING	1820-1 531 (600-1)	1820-1½ 531 (600-1½)	1980-2¼ 691 (700-2¼)		

