

WAAS
CH **45611**
W04A

APP CRS
044°

Rwy Idg
TDZE
Apt Elev
8001
535
559

RNAV (GPS) RWY 4


FREDERICK DOUGLASS-GREATER ROCHESTER INTL (ROC)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV Cats C/D visibility to 1½.

ALSF-2


MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct BILAW and hold.

ATIS 124.825	ROCHESTER APP CON 119.55 269.6	ROCHESTER TOWER 118.3 254.3	GND CON 121.7	CLNC DEL 118.8 343.65
------------------------	--	---------------------------------------	-------------------------	---------------------------------

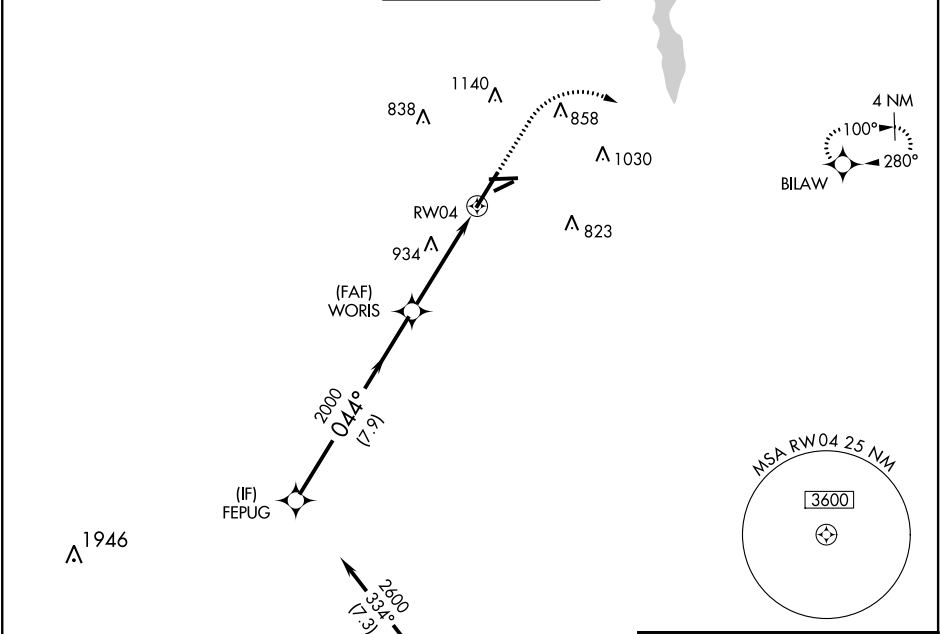

ELEV 559

TDZE 535

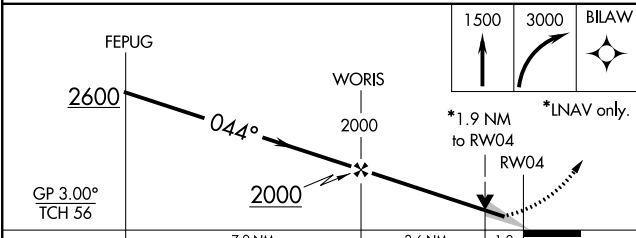

CATEGORY	A	B	C	D
LPV DA		735/18	200 (200-½)	
LNAV/VNAV DA		1290-2¼	755 (800-2¼)	
LNAV MDA	1200/24	665 (700-½)	1200-1½	665 (700-1½)
CIRCLING	1200-1	641 (700-1)	1500-2¾ 941 (1000-2¾)	1500-3 941 (1000-3)

