

APP CRS	Rwy Idg	6013
060°	TDZE	6
	Apt Elev	9

RNAV (RNP) Z RWY 6

TETERBORO (TEB)


▼

For uncompensated Baro-VNAV systems, procedure NA below -13°C (8°F) or above 54°C (130°F). For inoperative MALSR, increase RNP 0.30 all Cats visibility to 2 ¼. RF required. GPS required.


MALSR

MISSED APPROACH: Climb to 2000 on track 060° to PIXDY and on track 039° to ANGLE and hold.

D-ATIS	NEW YORK APP CON	TETERBORO TOWER	GND CON	CLNC DEL	CPDLC
114.2 132.85	127.6 379.9	119.5	121.9	128.05	

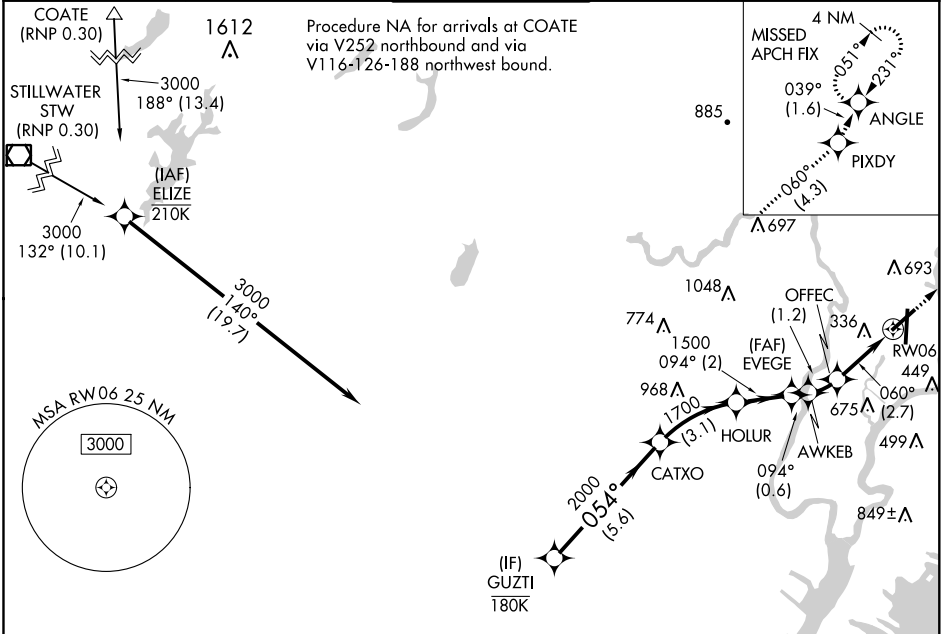

GUZTI	CATXO	HOLUR	EVEGE	AWKEB	OFFEC	RW06
3000	1700	1700	1500	1304	931	700
GP 3.00°	054°	094°	060°			
TCH 53						
	5.6 NM	3.1 NM	2 NM	0.6 NM	1.2 NM	2.7 NM
CATEGORY	A	B	C	D		
RNP 0.30 DA	679-2	673 (700-2)				

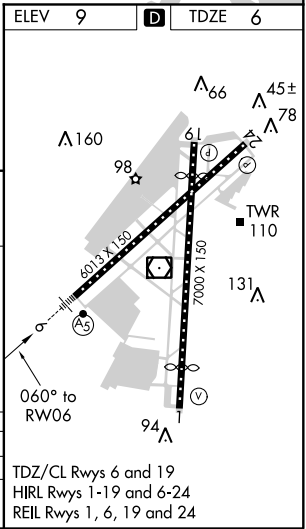

AUTHORIZATION REQUIRED

TDZ/CL Rws 6 and 19
HIRL Rws 1-19 and 6-24
REIL Rws 1, 6, 19 and 24