WAAS CH **87116** **W20A** | APP CRS **205°** | Rwy Idg **5600** TDZE **568** Apt Elev **571**

RNAV (GPS) RWY 20

DANVILLE RGNL (DAN)

RNP APCH.

Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.

MISSED APPROACH: Climb to 2500 direct LANTA and hold.

ASOS	WASHINGTON CENTER	UNICOM
128.125	**124.05 307.0**	**123.05** (CTAF) L

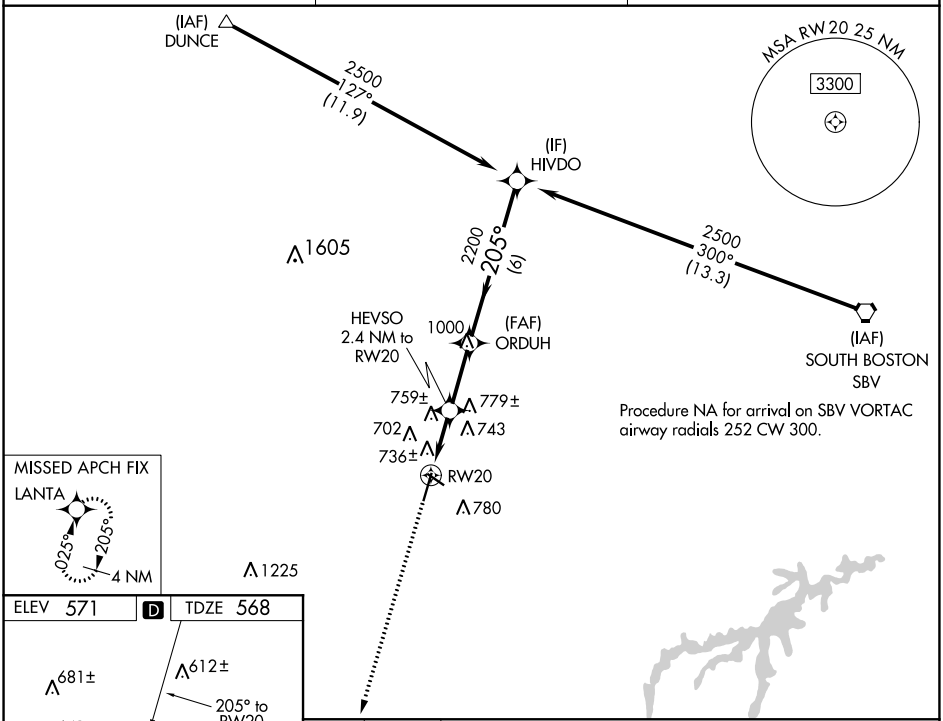

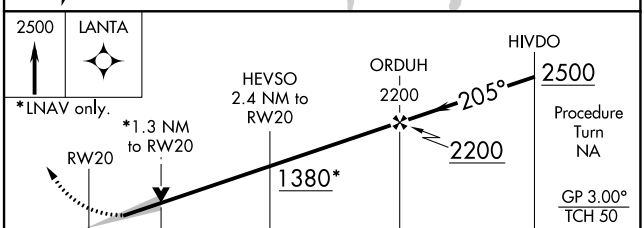

CATEGORY	A	B	C	D
LPV DA	768-1 200 (200-1)			
LNAV/VNAV DA	1026-1½ 458 (500-1½)			
LNAV MDA	1020-1 452 (500-1)		1020-1¼ 452 (500-1¼)	1020-1½ 452 (500-1½)

NE-3, 03 DEC 2020 to 31 DEC 2020
NE-3, 03 DEC 2020 to 31 DEC 2020