WAAS	APP CRS	Rwy Idg	7000
CH 49011	091°	TDZE	695
W09A		Apt Elev	703

RNAV (GPS) RWY 9

HAGERSTOWN RGNL-RICHARD A HENSON FIELD (HGR)

T A Rwy 20 helicopter visibility reduction below 1 SM NA .Circling Rwy 20 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Martinsburg altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats and LNAV Cats C-D and Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA with Martinsburg altimeter setting.

MISSED APPROACH: Climb to 4000 direct HAIGS and hold.

ASOS	POTOMAC APP CON	HAGERSTOWN TOWER ★	GND CON	UNICOM
126.375	126.825 239.025	120.3 (CTAF) L 225.4	120.8	122.95

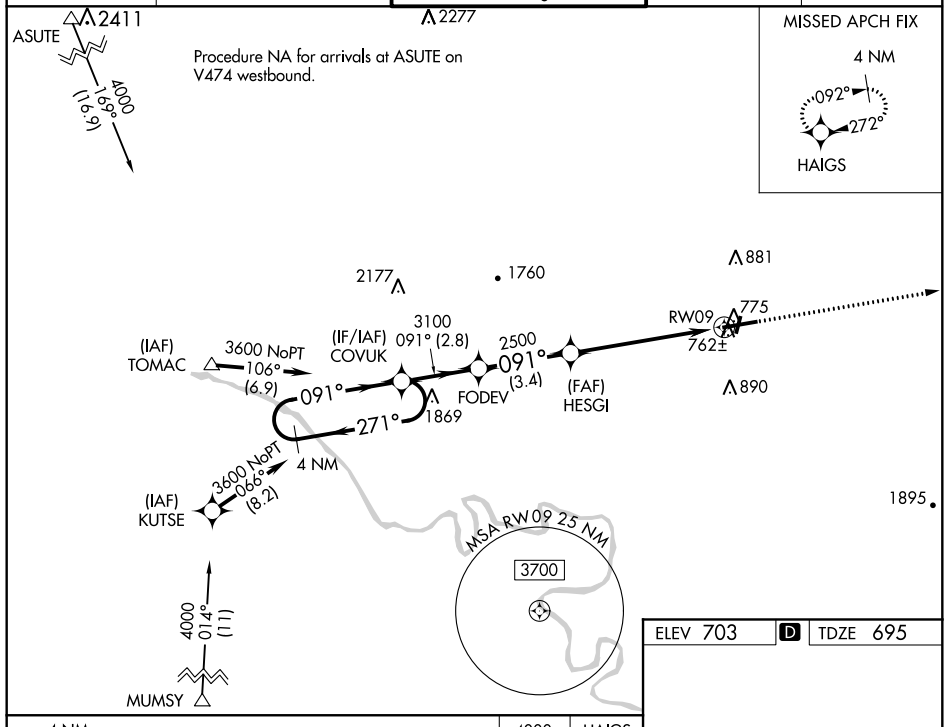

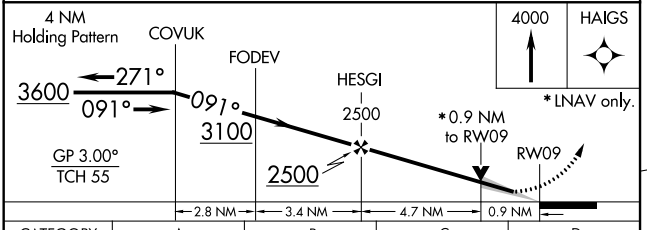

CATEGORY	A	B	C	D
LPV DA	895-¾ 200 (200-¾)			
LNAV/VNAV DA	954-¾ 259 (300-¾)			
LNAV MDA	1020-1 325 (400-1)			
C CIRCLING	1160-1 457 (500-1)		1200-1½ 497 (500-1½)	1320-2 617 (700-2)



REIL Rwys 2 and 20
REIL Rwy 9 L
MIRL Rwy 2-20
HIRL Rwy 9-27 L

NE-3, 03 DEC 2020 to 31 DEC 2020
NE-3, 03 DEC 2020 to 31 DEC 2020