

WAAS CH 86823 W36A	APP CRS 358°	Rwy Idg TDZE 140 Apt Elev 140	5005
--	------------------------	---	-------------

RNAV (GPS) RWY 36

CLEVELAND MUNI (RNV)



⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Greenville altimeter setting. When local altimeter setting not received, use Greenville altimeter setting and increase LPV DA to 438, LNAV/VNAV DA to 597, and all MDA 60 feet; increase LPV all Cats and LNAV Cats C/D visibility ¼ mile, and LNAV/VNAV all Cats visibility ⅓ mile. Rwy 36 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2100 direct JOMEM and hold.

AWOS-3PT 124.175	MEMPHIS CENTER 135.875 269.35	UNICOM 122.725 (CTAF) 0
----------------------------	---	-----------------------------------

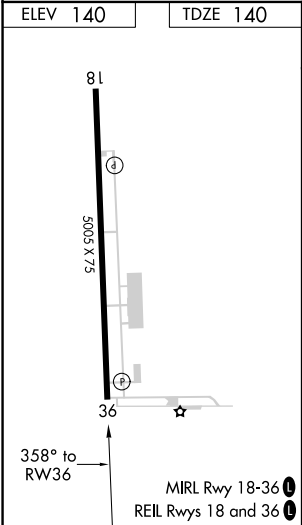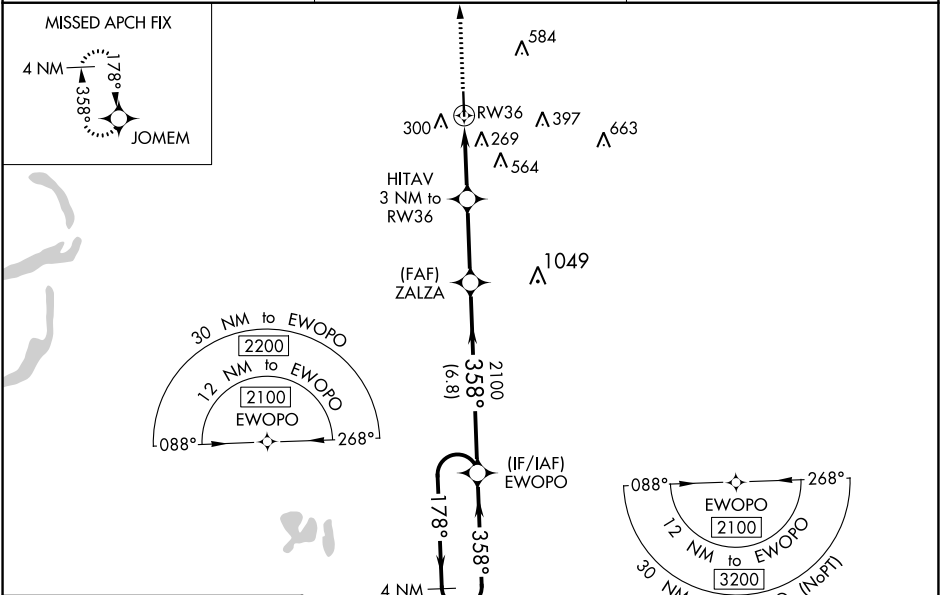

2100	JOMEM	VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 46).			
HITAV	ZALZA	EWOP	4 NM Holding Pattern		
3 NM to RW36	2100		178°	2100	
*LNAV only.	*1.1 NM to RW36	*1140	358°	2100	GP 3.00° TCH 54
1.1	1.9	3 NM	6.8 NM		
CATEGORY	A	B	C	D	
LPV DA	390-¾		250 (300-¾)		
LNAV/VNAV DA	549-1⅜		409 (500-1⅜)		
LNAV MDA	520-1		380 (400-1)		
CIRCLING	600-1	460 (500-1)	900-2¼ 760 (800-2¼)	900-2½ 760 (800-2½)	