MMALT FIVE DEPARTURE (RNAV)

(MMALT5.MMALT) 25APR19

ATIS
135.575 269.9
GND CON
121.6 275.8
ELLINGTON TOWER
126.05 253.5
HOUSTON DEP CON
134.45 284.0

TAKEOFF MINIMUMS
Rwy 4, 17L/R, 22, 35L/R: Standard with minimum climb of 500' per NM to 540.

TOP ALTITUDE: ASSIGNED BY ATC

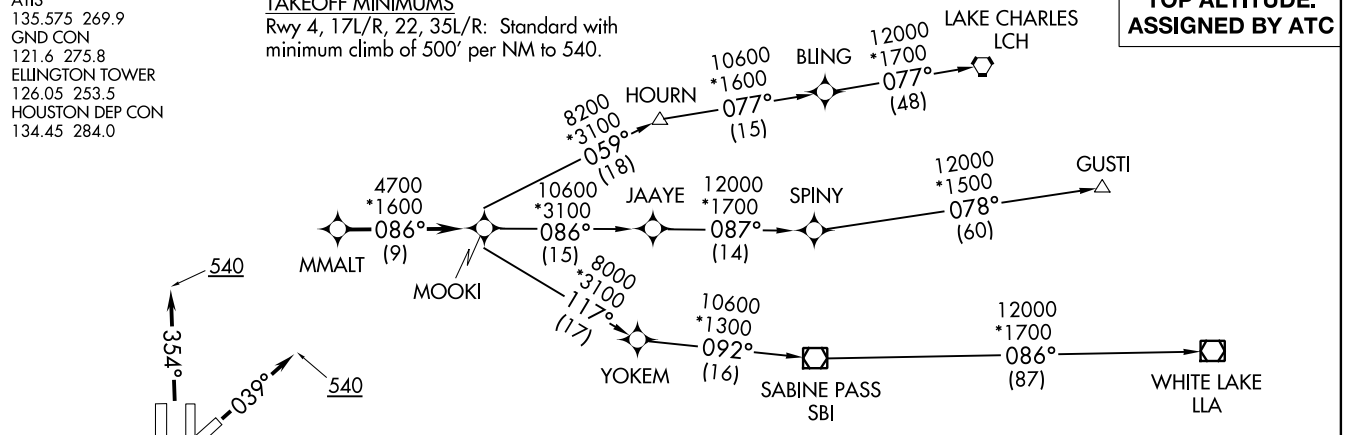

NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: GUSTI and LCH TRANSITIONS ATC assigned only for aircraft departing AXH, EFD, GLS, HPY, IWS, LBX, LVJ, SGR, TME, T00, T41 and 54T.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 4: Climb on heading 039° to 540 for RADAR vectors to MMALT, thence. . . .
TAKEOFF RWYS 17L/R: Climb on heading 174° to 540 for RADAR vectors to MMALT, thence. . . .
TAKEOFF RWY 22: Climb on heading 219° to 540 for RADAR vectors to MMALT, thence. . . .
TAKEOFF RWYS 35L/R: Climb on heading 354° to 540 for RADAR vectors to MMALT, thence. . . .

. . . .on track 086° to MOOKI, then on (transition). Maintain ATC assigned altitude.
Expect filed altitude 10 minutes after departure.

GUSTI TRANSITION (MMALT5.GUSTI)
LAKE CHARLES TRANSITION (MMALT5.LCH)
WHITE LAKE TRANSITION (MMALT5.LLA)

HOUSTON, TEXAS
ELLINGTON (EFD)

(MMALT5.MMALT) 19115
MMALT FIVE DEPARTURE (RNAV)

AL-197 (FAA)

ELLINGTON (EFD)
HOUSTON, TEXAS