

APP CRS
021°


Rwy Idg **4002**
TDZE **765**
Apt Elev **765**

RNAV (GPS) RWY 2
CENTERVILLE MUNI (GHM)

Obtain local altimeter setting on CTAF, when not received, use Columbia/Mount Pleasant altimeter setting and increase all MDA 80 feet. Increase LNAV Cats C and D visibility ¾ mile and Circling Cat D ¼ mile. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 3000 direct ZAVOS and hold.

MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF) 0
--	---------------------------------

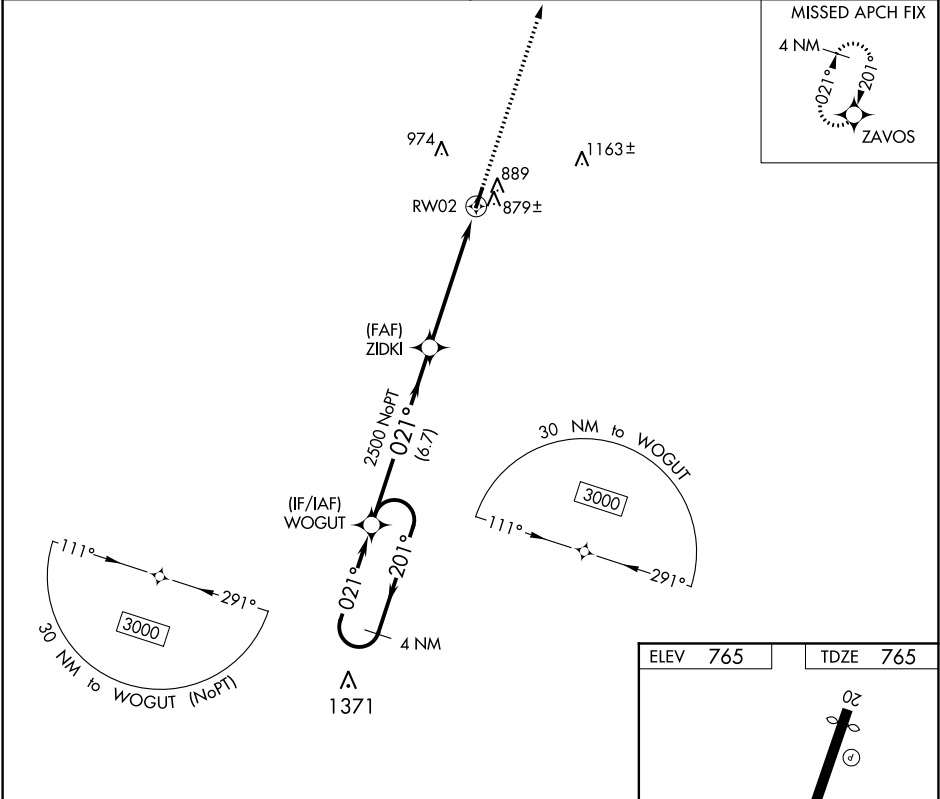

4 NM Holding Pattern WOGUT

VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 53).

3000 ZAVOS

3000 ← 201°

021° →

021°

ZIDKI

2500

3.00° TCH 40

RW02

6.7 NM

5.3 NM

CATEGORY	A	B	C	D
LNAV MDA	1140-1 375 (400-1)			
CIRCLING	1260-1 495 (500-1)	1280-1½ 515 (600-1½)	1520-2½ 755 (800-2½)	

ELEV 765 TDZE 765

4002 X 75

021° to RW02

MIRL Rwy 2-20 REIL Rwy 2 and 20