

LOC/DME I-RSW
111.5
Chan **52**

APP CRS
058°

Rwy Idg **12000**
TDZE **27**
Apt Elev **30**


ILS or LOC/DME RWY 6
SOUTHWEST FLORIDA INTL (RSW)

For inap MALS, increase S-ILS 6 Cat E visibility to RVR 4000 and S-LOC 6 Cat E visibility to RVR 6000.

MALS

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on RSW VORTAC R-140 to CORFU INT/RSW 10 DME and hold.

D-ATIS 124.65	FORT MYERS APP CON ★ 126.8 306.2	FORT MYERS TOWER ★ 128.75(CTAF) 0 257.8	GND CON 121.9 257.8	CLNC DEL 132.075	UNICOM 122.95
-------------------------	--	---	-------------------------------	----------------------------	-------------------------

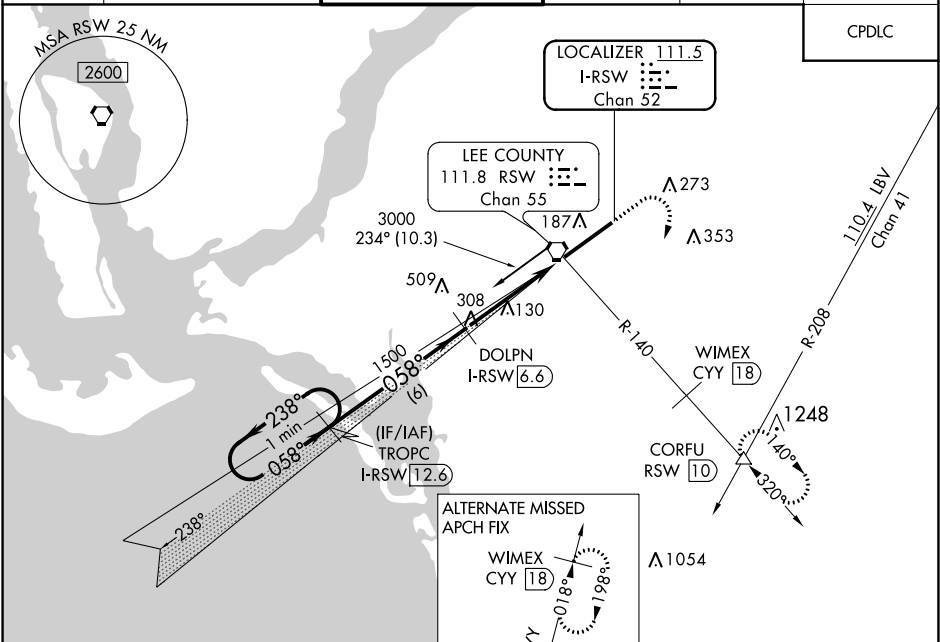

One Minute Holding Pattern

TROP I-RSW 12.6

DOLPN I-RSW 6.6

3000 ← 238°

→ 058°

GS 3.00° TCH 55

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 69).

1500

1500

6 NM

3.5 NM

1 NM

1000

3000

CORFU

*LOC only.

*I-RSW 3.1

I-RSW 2.2

058° 4.5 NM from FAF

CATEGORY	A	B	C	D	E
S-ILS 6	227/18 200 (200-½)				
S-LOC 6	380/24 353 (400-½)		380/30 353 (400-¾)		
CIRCLING	500-1 470 (500-1)		500-1½ 470 (500-1½)	580-2 550 (600-2)	660-2¼ 630 (700-2¼)

REIL Rwy 24
TDZ/CL Rwy 6
HIRL Rwy 6-24