WAAS CH 97426 W05A	APP CRS 046°	Rwy Idg 4956 TDZE 21 Apt Elev 21

RNAV (GPS) RWY 5
TAMPA EXECUTIVE (VDF)

RNP APCH.

Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 316 feet, LNAV/VNAV DA to 507 feet; increase all MDAs 40 feet and increase LNAV and Circling Cat C visibilities ¼ SM. Baro-VNAV and VDP NA when using Tampa Intl altimeter setting. Circling Rwy 18, 36 NA at night.

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct LAL VORTAC and hold.

AWOS-3	TAMPA APP CON	UNICOM
121.125	119.9 290.3	122.7 (CTAF) L

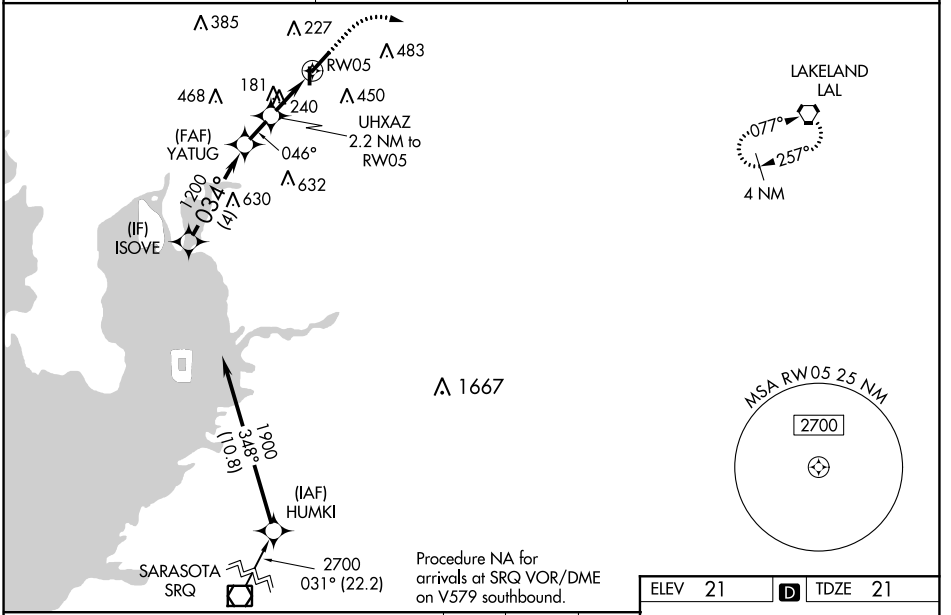

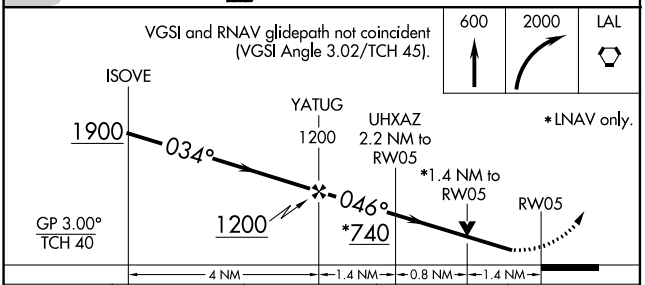

CATEGORY	A	B	C	D
LPV DA	271-⅞ 250 (300-⅞)			NA
LNAV/VNAV DA	507-1⅝ 486 (500-1⅝)			NA
LNAV MDA	500-1 479 (500-1)		500-1⅜ 479 (500-1⅜)	NA
CIRCLING	500-1 479 (500-1)	760-⅞ 739 (800-⅞)	760-2 739 (800-2)	NA

ELEV 21 D TDZE 21

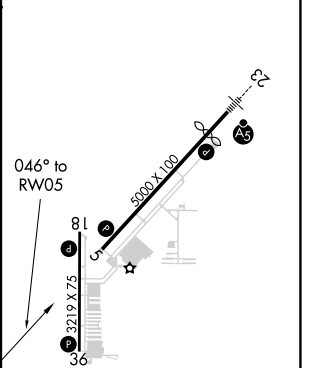

REIL Rwys 5, 18, and 36 L
MIRL Rwys 5-23 and 18-36 L

SE-3, 03 DEC 2020 to 31 DEC 2020
SE-3, 03 DEC 2020 to 31 DEC 2020