LOC I-CDB	APP CRS	Rwy Idg / TDZE / Apt Elev
110.3	146°	10179 / 75 / 100

ILS or LOC RWY 15
COLD BAY (CDB) (PACD)

DME required.

Circling NA for Cats B/C/D southwest of Rwy 15-33. DME from CDB VORTAC.

Simultaneous reception of I-CDB and CDB DME required. DME values will decrease then increase prior to reaching missed approach point. Circling NA for Cat A southwest of Rwy 15-33 at night. For inop ALS, increase S-LOC 15 Cats C and D visibility to RVR 5500. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2700 direct CDB VORTAC and hold, continue climb-in-hold to 2700.

ASOS	ANCHORAGE CENTER	COLD BAY RADIO
135.75	118.5 278.3	123.6 (CTAF) L

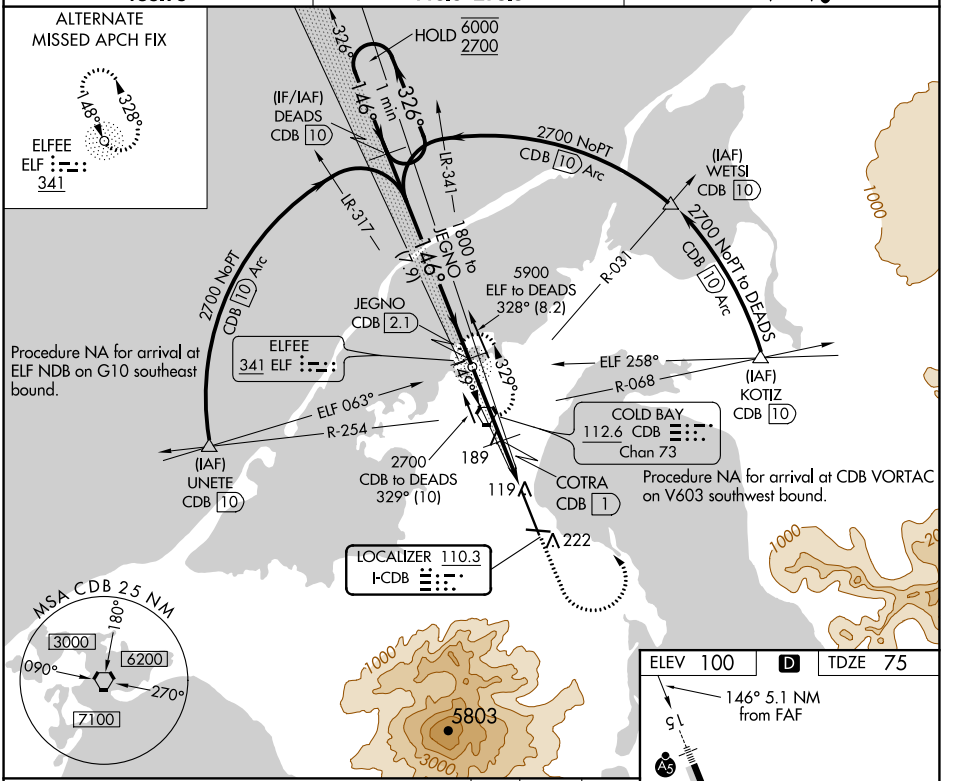

CATEGORY	A	B	C	D
S-ILS 15 #	275/24 200 (200-½)			
S-LOC 15	440/24 365 (400-½)		440/35 365 (400-⅝)	
C CIRCLING	540-1 440 (500-1)	560-1 460 (500-1)	560-1½ 460 (500-1½)	860-2½ 760 (800-2½)

HIRL all Rwys L

AK, 31 DEC 2020 to 25 FEB 2021
AK, 31 DEC 2020 to 25 FEB 2021