


WAAS CH 63129 W08A	APP CRS 082°	Rwy Idg 3501 TDZE 739 Apt Elev 741
--	------------------------	---

RNAV (GPS) RWY 8

MACKINAC ISLAND (MCD)

RNP APCH. ▼ Rwy 8 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Pellston altimeter setting and increase all MDA 60 feet, increase LP and LNAV Cat C visibility ½ SM and Circling Cat C visibility ¼ SM. Straight-in and Circling Rwy 8 NA at night. ▲	MISSED APPROACH: Climb to 2500 direct HUVTI and hold.
---	--

AWOS-3 118.275	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 122.7 (CTAF)	122.8
--------------------------	---	-------------------------------	--------------

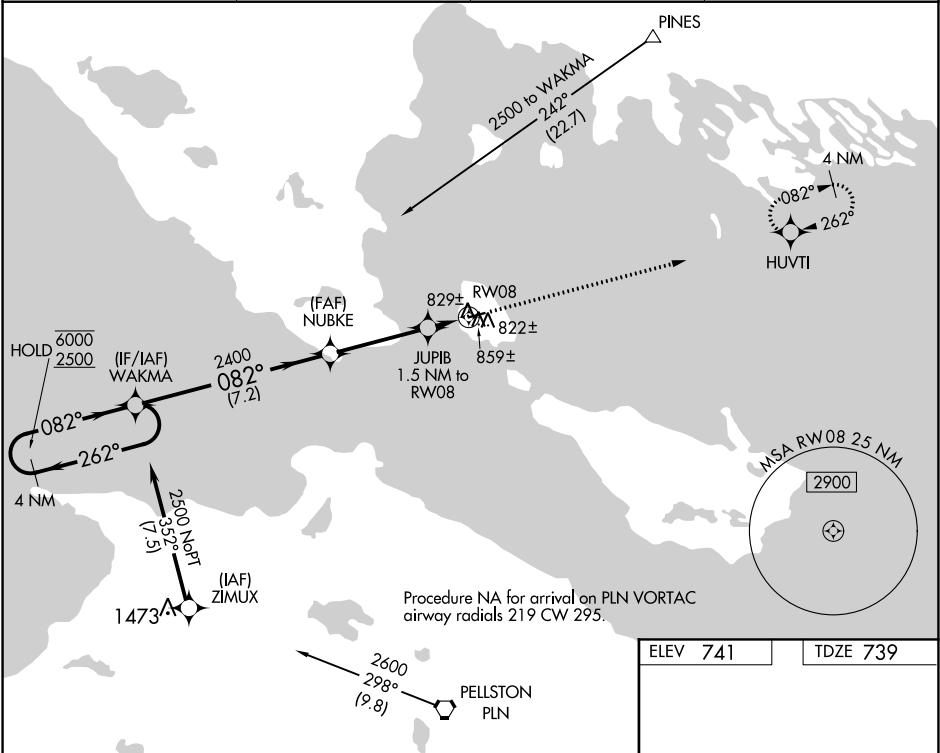

4 NM Holding Pattern		Visual Segment - Obstacles.		2500	HUVTI
6000 ← 262°		WAKMA		NUBKE	
2500 → 082°		082°		JUPIB 1.5 NM to RWY 8	
		2400		RWY 8	
		7.2 NM		1240	
		3.6 NM		1.5	
CATEGORY	A	B	C	D	
LP MDA	1080-1 341 (400-1)				NA
LNAV MDA	1120-1	381 (400-1)	1120-1½ 381 (400-1½)	NA	
CIRCLING	1320-1	579 (600-1)	1320-1½ 579 (600-1½)	NA	

