



VOR OLK	APP CRS	Rwy Idg	5100
110.4	099°	TDZE	845
		Apt Elev	850

VOR RWY 9
WARSAW MUNI (ASW)

⚠ Visibility reduction by helicopters NA. When local altimeter setting not received, use Goshen altimeter setting and increase all MDA 40 feet. Circling to Rwy 36 NA at night. When VGSI inoperative, Circling Rwy 18 NA at night.

MISSED APPROACH: Climb to 2800 direct OLK VOR and hold.

AWOS-3 121.125	FORT WAYNE APP CON 127.2 284.6	CLNC DEL 134.05	UNICOM 122.7 (CTAF) 0
-------------------	-----------------------------------	--------------------	--------------------------

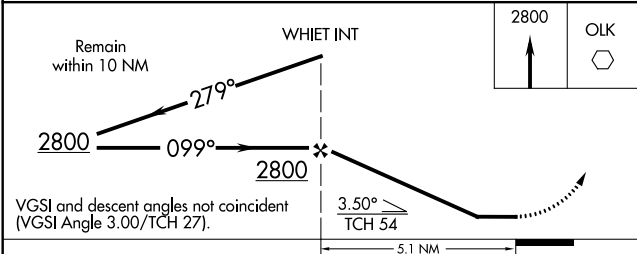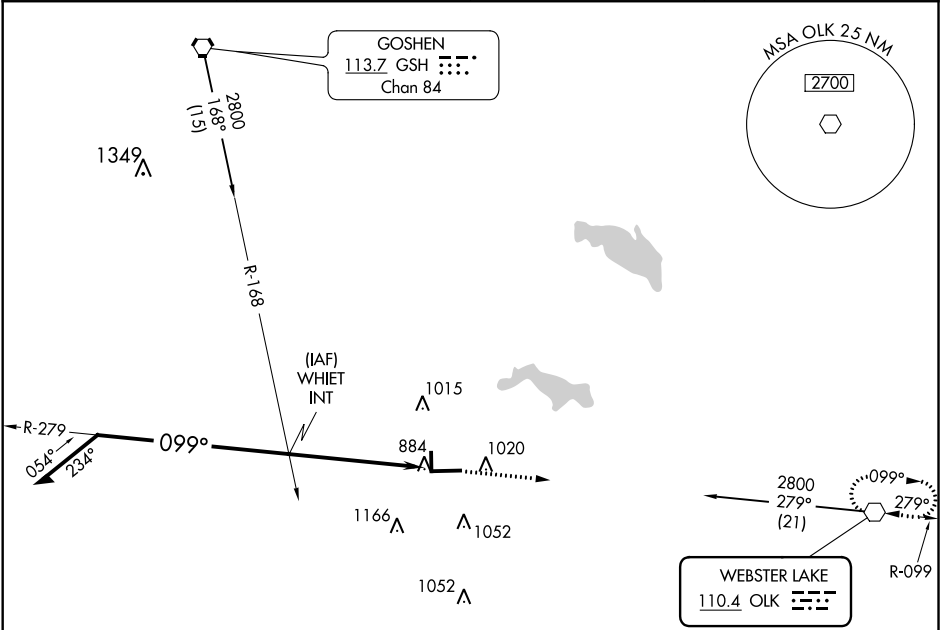

CATEGORY	A	B	C	D
S-9	1380-1	535 (600-1)	1380-1½ 535 (600-1½)	1380-1¾ 535 (600-1¾)
CIRCLING	1380-1	530 (600-1)	1380-1½ 530 (600-1½)	1400-2 550 (600-2)

ELEV 850 TDZE 845

940±

81

4021 X 75

6

36

6001 X 100

099° 5.1 NM from FAF

HIRL Rwy 9-27 0

MIRL Rwy 18-36 0

REIL Rwys 9 and 27 0

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42