


APP CRS	Rwy Idg	3901
162°	TDZE	858
	Apt Elev	862

RNAV (GPS) RWY 16

INDIANAPOLIS RGNL (MQJ)

RNP APCH.		MISSED APPROACH: Climb to 2600 direct DOBAC and hold.	
VDP NA with Indianapolis Intl altimeter setting. When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all MDA 60 feet, increase LNAV Cat C/D visibility 1/8 mile increase Circling Cat D visibility 1/4 mile. Rwy 16 helicopter visibility reduction below 3/4 SM NA.			
AWOS-3 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF) 0

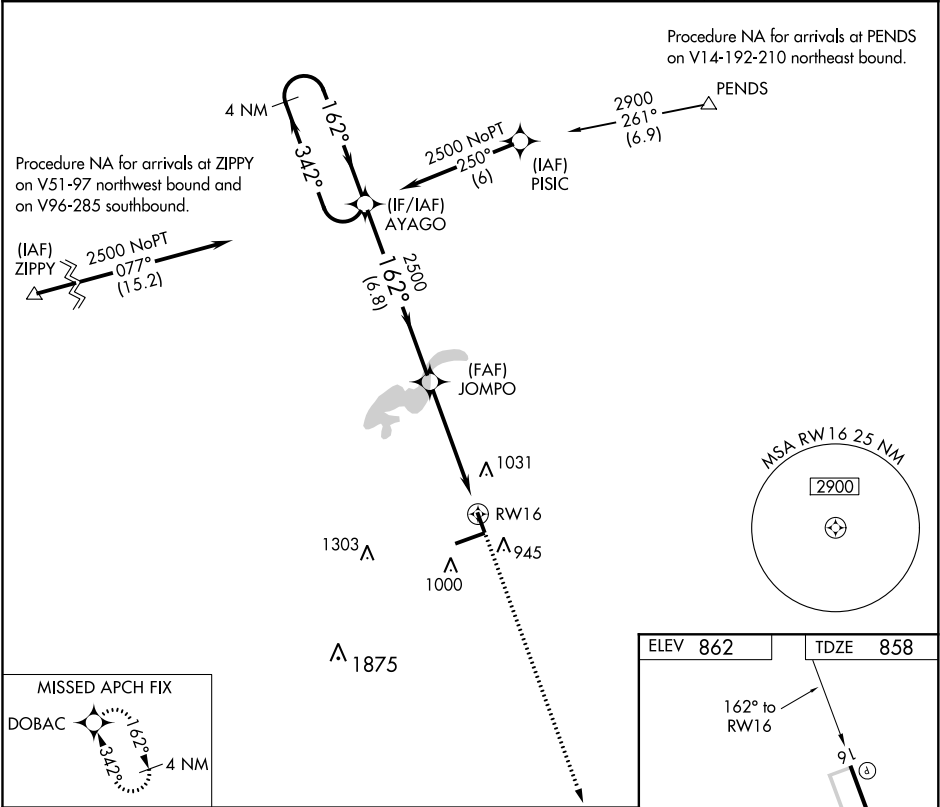

4 NM Holding Pattern		Visual Segment - Obstacles.		2600 ↑	DOBAC ✦
AYAGO		JOMPO			
2500 ← 342° 162° →		2500 ✕ 162°		1.3 NM to RW16 RW16	
6.8 NM		3.8 NM		1.3	
CATEGORY	A	B	C	D	
LNAV MDA	1320-1	462 (500-1)	1320-1 3/8	462 (500-1 3/8)	
CIRCLING	1340-1	478 (500-1)	1360-1 1/2 498 (500-1 1/2)	1660-2 1/2 798 (800-2 1/2)	

