| WAAS | APP CRS | | |
|---|---|---|---|
| CH **93920** | **308°** | Rwy Idg | **4010** |
| **W31A** | | TDZE | **1123** |
| | | Apt Elev | **1123** |

# RNAV (GPS) RWY 31

## LITTLE FALLS/MORRISON COUNTY-LINDBERGH FIELD (LXL)

RNP APCH.

Baro-VNAV NA when using St Cloud altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 32°C. Rwy 31 visibility reduction below ¾ SM by helicopters NA. When local altimeter setting not received use St Cloud altimeter setting and increase all DA 76 feet and all MDA 80 feet, increase LPV all Cats and Circling Cat C visibility ½ mile and LNAV/VNAV all Cats, LNAV Cats C/D, and Circling Cat D ¼ mile. Circling Rwy 18, 36 NA.

MISSED APPROACH: Climb to 3000 direct ZUGUT and hold.

| AWOS-3 | MINNEAPOLIS CENTER | GCO | UNICOM |
|---|---|---|---|
| **119.45** | **118.05 239.0** | **121.725** | **122.8** (CTAF) L |

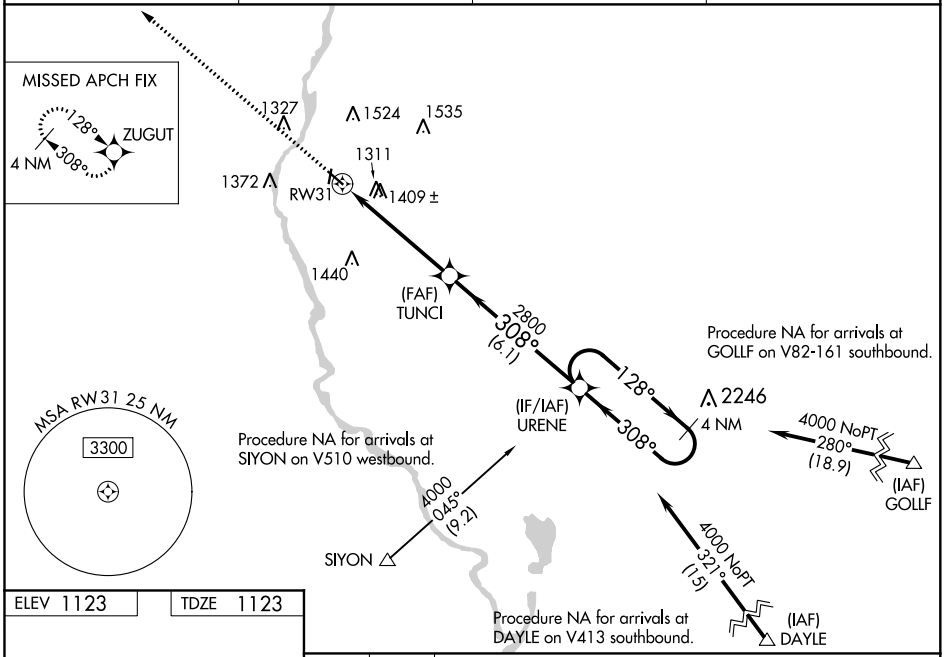


ELEV 1123 TDZ 1123

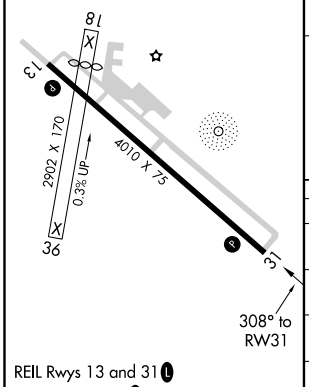


REIL Rwys 13 and 31 L
MIRL Rwy 13-31 L

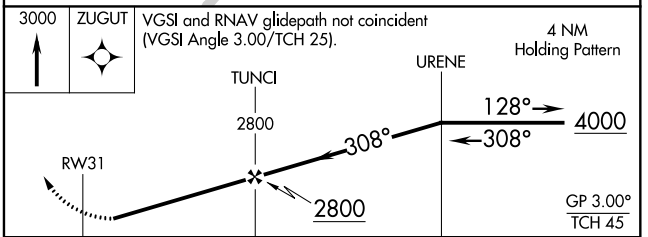


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1517-1⅜ 394 (400-1⅜) | | | |
| LNAV/VNAV DA | 1749-2¼ 626 (700-2¼) | | | |
| LNAV MDA | 1660-1 537 (600-1) | | 1660-1½ 537 (600-1½) | |
| CIRCLING | 1700-1 577 (600-1) | 1720-1 597 (600-1) | 1720-1½ 597 (600-1½) | 2000-2¾ 877 (900-2¾) |



NC-1, 31 DEC 2020 to 28 JAN 2021
NC-1, 31 DEC 2020 to 28 JAN 2021