

LOC I-TEB	APP CRS	Rwy Idg	6013
108.9	060°	TDZE	6
		Apt Elev	8

ILS or LOC RWY 6

TETERBORO (TEB)


DME or RADAR required. ADF required for LOC only.

DME from TEB VOR/DME. For inop ALS, increase LOC Cat C/D visibility to 1½ SM. Circling NA Cats B, C, and D northwest of Rwy 6 and 19. When Circling to Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MALSR

MISSED APPROACH:
Climb to 1000, then climbing left turn to 2500 on TEB R-335 to PATRN INT and hold.

D-ATIS	NEW YORK APP CON	TETERBORO TOWER	GND CON	CLNC DEL	CPDLC
114.2 132.85	127.6 379.9	119.5	121.9	128.05	

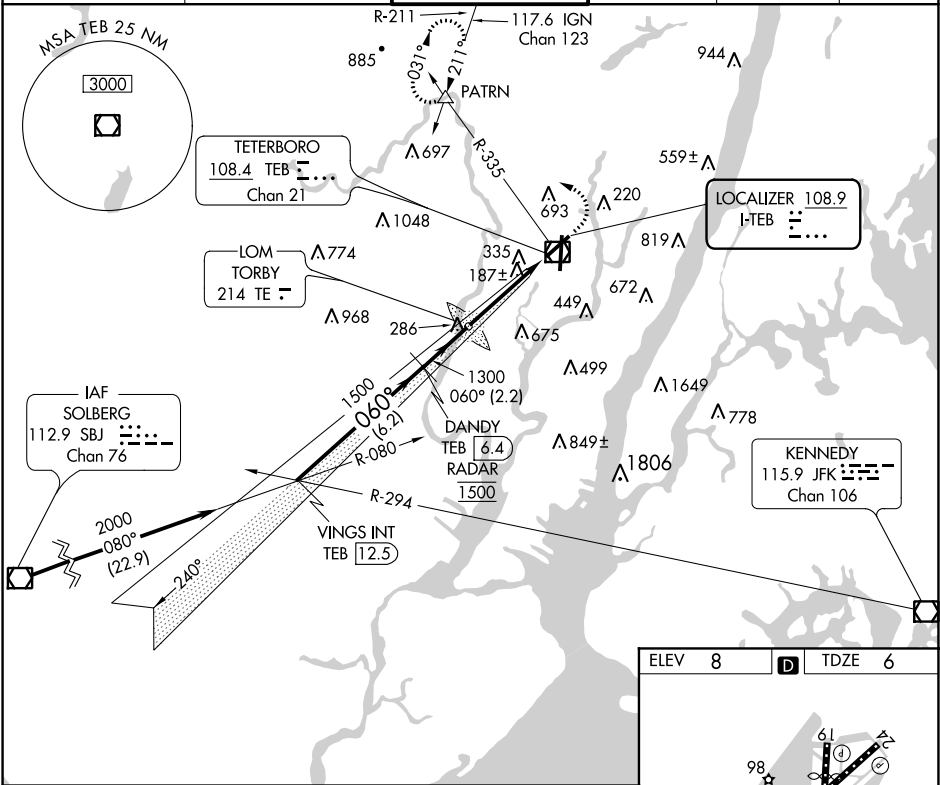

CATEGORY	VINGS INT TEB [12.5]		DANDY TEB [6.4] RADAR		TORBY LOM		1000	2500	PATRN
	Procedure Turn NA						↑	TEB R-335	△
	2000		1500		1300				
	GS 3.00° TCH 53		6.2 NM		2.2 NM		3.8 NM		
S-ILS 6	206/18		200 (200-½)						
S-LOC 6	500/24	494 (500-½)	500/50		494 (500-1)				
CIRCLING	760-1 752 (800-1)	760-1¼ 752 (800-1¼)	820-2½ 812 (900-2½)		1040-3 1032 (1100-3)				

