

WAAS CH 40412 W33A	APP CRS 329°	Rwy Idg 4222 TDZE 67 Apt Elev 81
--	------------------------	---

RNAV (GPS) RWY 33

BROOKHAVEN (HWV)


⚠

Baro-VNAV NA when using Islip altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Islip altimeter setting and increase all DA 28 feet and all MDA 40 feet, and increase LNAV/VNAV all Cats visibility ¼ mile. VDP NA when using Islip altimeter setting.

MISSED APPROACH:

Climb to 2000 direct INOSE and right turn via track 083° to CCC VOR/DME and hold.

ASOS 119.625	NEW YORK APP CON 120.05 343.75	CLNC DEL 133.2	UNICOM 122.8 (CTAF) 0
------------------------	--	--------------------------	---------------------------------

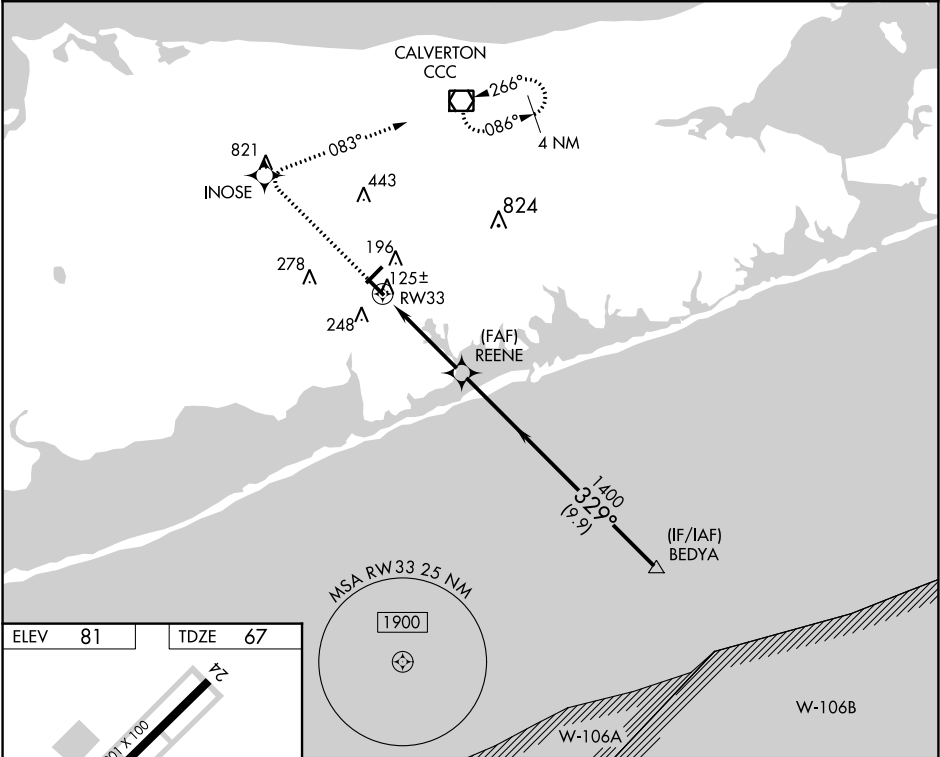

ELEV 81

TDZE 67

2000 INOSE

CCC

*LNAV only

RENE

BEDYA

4000

Procedure Turn NA

GP 3.00° TCH 46

1.2 NM

2.8 NM

9.9 NM

CATEGORY	A	B	C	D
LPV DA	346-1	279 (300-1)		NA
LNAV/VNAV DA	449-1¼	382 (400-1¼)		NA
LNAV MDA	500-1	433 (500-1)		NA
CIRCLING	560-1	479 (500-1)		NA