
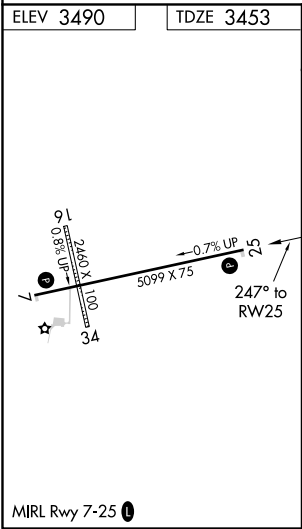


WAAS CH 61229 W25A	APP CRS 247°	Rwy Idg TDZE 3453 Apt Elev 3490
--	------------------------	---

RNAV (GPS) RWY 25

ROUNDUP (R.PX)

<div><div><div>⚠</div><div>NA</div></div><div>When VGSI inop, Circling to Rwy 7 NA at night. Baro-VNAV NA. Use Billings altimeter setting; when not received, procedure NA. DME/DME RNP-0.3 NA.</div></div>		MISSED APPROACH: Climb to 6600 direct SWIVL and hold	
BIL ASOS 126.3	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF)	122.7 0

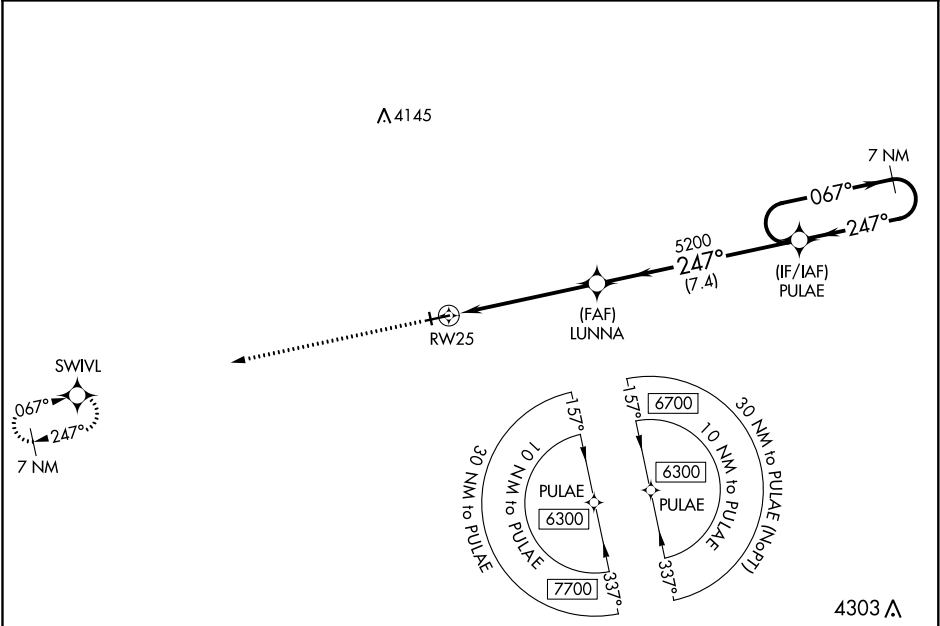

6600

SWIVL

PULAE

7 NM Holding Pattern

067°

247°

6300

GP 3.00°

TCH 45

LUNNA

5200

247°

5200

RW25

5.4 NM

7.4 NM

CATEGORY	A	B	C	D
LPV DA	3768-1		315 (300-1)	
LNAV/VNAV DA	3818-1¼		365 (400-1¼)	
LNAV MDA	3900-1	447 (500-1)	3900-1⅓	447 (500-1⅓)
CIRCLING	4000-1	510 (600-1)	4000-1½ 510 (600-1½)	4040-2 550 (600-2)