

LOC/DME F-HIT	APP CRS	Rwy Idg	8273
110.3	047°	TDZE	258
Chan 40		Apt Elev	266

BILL AND HILLARY CLINTON NATIONAL/ADAMS FIELD (LIT)



ILS or LOC RWY 4L

Inop table does not apply to S-ILS 4L all Cats. Simultaneous approach authorized. Rwy 4L helicopter visibility reduction below RVR 4000 NA. LOC minimums: For inop ALS, increase S-LOC 4L Cats A/B visibility to 1 SM and Cats C/D visibility to 2 SM. JIRUR fix minimums: For inop ALS, increase S-LOC 4L Cats A/B visibility to 1 SM and Cats C/D visibility to 1 3/8 SM.



MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 on heading 260° and on LIT VORTAC R-303 to ROLAN INT/LIT 16.7 DME and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 353.6	118.7 257.8	121.9 339.8	118.95

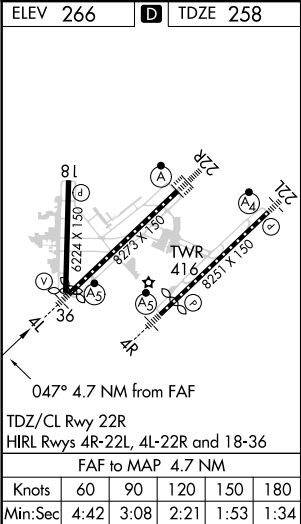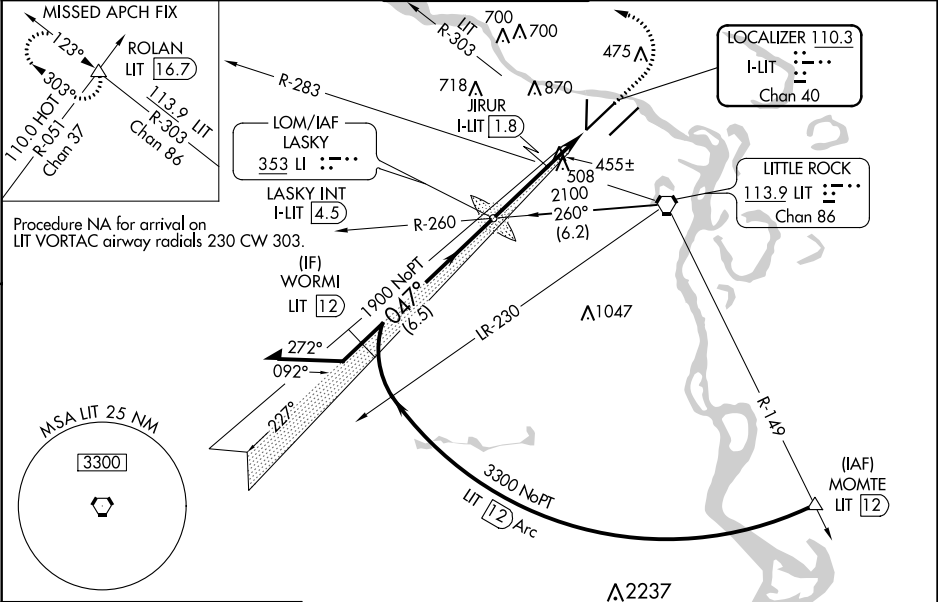

Remain within 10 NM	LOM/INT I-LIT 4.5	1500	3500	LIT R-303	ROLAN
2100	227°	1814	hdg 260°		
047°	1900	JIRUR INT I-LIT 1.8	*I-LIT 1	*LOC only.	
Use I-LIT DME when on the localizer course.					
		2.7 NM	0.8 NM	1.2 NM	
CATEGORY	A	B	C	D	
S-ILS 4L		508/40	250 (300-3/4)		
S-LOC 4L	960/40	702 (700-3/4)	960-1 5/8	702 (700-1 5/8)	
CIRCLING	960-1 694 (700-1)	1000-1 734 (800-1)	1180-2 3/4 914 (1000-2 3/4)	1180-3 914 (1000-3)	
JIRUR FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					
S-LOC 4L	720/40	462 (500-3/4)	720/50	462 (500-1)	
CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2 3/4 914 (1000-2 3/4)	1180-3 914 (1000-3)	