

WAAS CH 65908 W34A	APP CRS 336°	Rwy Idg 3998 TDZE 684 Apt Elev 686
--	------------------------	---

RNAV (GPS) RWY 34

HILLSBORO MUNI (INJ)



⚠

Baro-VNAV NA when using Celsburne Rgnl altimeter setting. DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Visibility reduction by helicopters NA. When local altimeter setting not received use Celsburne Rgnl altimeter setting and increase all DA/MDA 80 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats.

MISSED APPROACH:

Climb to 3000 direct COMUB and via 265° track to CELTC and hold.

AWOS-3 118.725	WACO APP CON 127.65 352.0	CTAF 122.9
--------------------------	-------------------------------------	----------------------

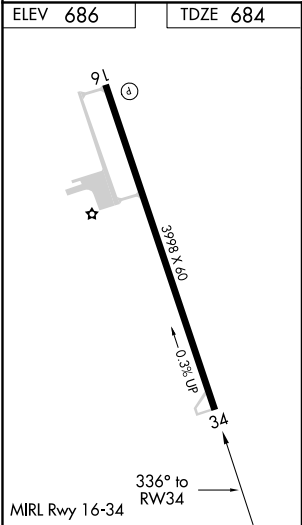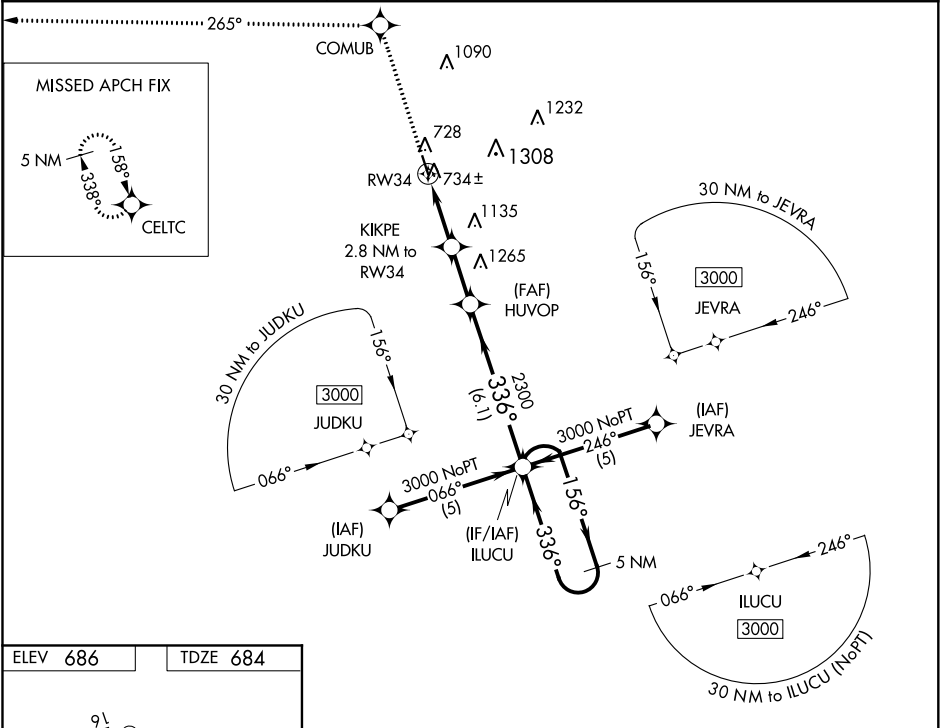

3000	COMUB	CELTC	HUVOP	ILUCU	5 NM Holding Pattern
↑	tr 265°				
*LNAV only					
	RW34	KIKPE 2.8 NM to RW34	HUVOP	ILUCU	5 NM Holding Pattern
		1600*	2300	3000	GP 3.00° TCH 40°
VGSI and RNAV glidepath not coincident.					
	2.8 NM	2.1 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	934-1	250 (300-1)		NA	
LNAV/VNAV DA	1004-1¼	320 (400-1¼)		NA	
LNAV MDA	1320-1	636 (700-1)		NA	
CIRCLING	1320-1	634 (700-1)		NA	

SC-2, 31 DEC 2020 to 28 JAN 2021

SC-2, 31 DEC 2020 to 28 JAN 2021