WAAS	APP CRS		
CH **86918**	**087°**	Rwy Idg	**4000**
W09A		TDZE	**967**
		Apt Elev	**979**

RNAV (GPS) RWY 9
BLUE GRASS (LEX)

Baro-VNAV NA when using Frankfort altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Frankfort altimeter setting. When local altimeter setting not received, use Frankfort altimeter setting: increase LPV DA to 1279 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1421 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct REBAA and hold.

ATIS	LEXINGTON APP CON	LEXINGTON TOWER	GND CON	CLNC DEL
126.3	**120.15 259.3**	**119.1 257.8**	**121.9**	**132.35**

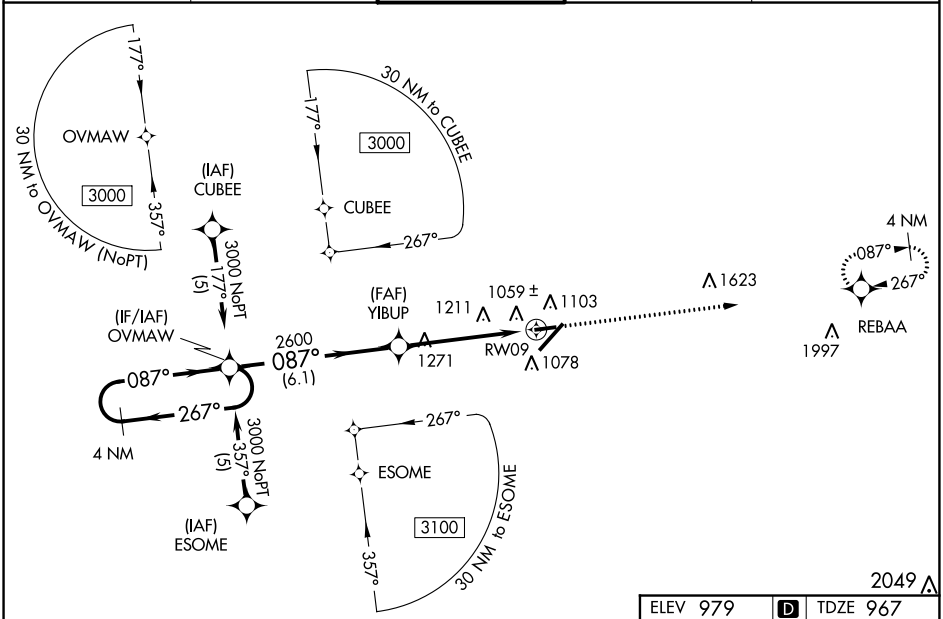

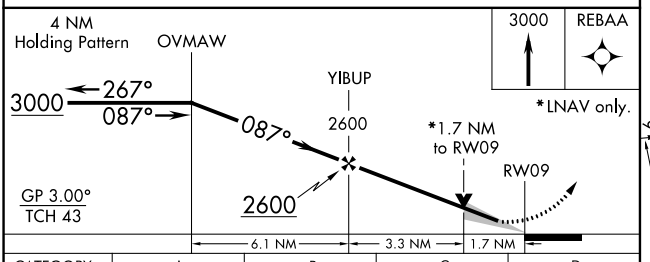

CATEGORY	A	B	C	D
LPV DA	1217-1 250 (300-1)			
LNAV/VNAV DA	1359-1½ 392 (400-1½)			
LNAV MDA	1540-1 573 (600-1)		1540-1½ 573 (600-1½)	1540-1¾ 573 (600-1¾)
C CIRCLING	1540-1 561 (600-1)		1540-1½ 561 (600-1½)	1600-2 621 (700-2)

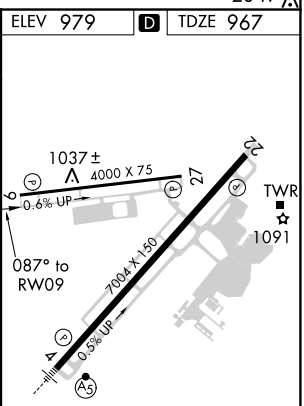

TDZ/CL Rwy 4
REIL Rwys 9, 22 and 27
HIRL Rwy 4-22
MIRL Rwy 9-27

SE-1, 31 DEC 2020 to 28 JAN 2021
SE-1, 31 DEC 2020 to 28 JAN 2021