

| | | |
|--|------------------------|---|
| WAAS CH 99511 W31A | APP CRS 311° | Rwy Idg TDZE 1283 Apt Elev 1289 |
|--|------------------------|---|

RNAV (GPS) RWY 31


PAULDING NORTHWEST ATLANTA (PUJ)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cartersville altimeter setting and increase all DA 106 feet and all MDA 120 feet and LPV all Cats and LNAV/VNAV all Cats and LNAV Cat C/D visibilities ¼ mile and Circling Cat C/D visibilities ½ mile. Baro-VNAV and VDP NA when using Cartersville altimeter setting.


MISSED APPROACH:
Climb to 3000 direct
YOBUY and hold.

| | | |
|--------------------------|---------------------------------------|-----------------------------------|
| AWOS-3 126.225 | ATLANTA APP CON 121.0 268.7 | UNICOM 123.075 (CTAF) 0 |
|--------------------------|---------------------------------------|-----------------------------------|

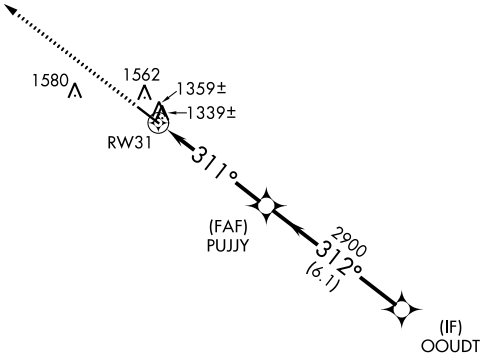


RADAR REQUIRED

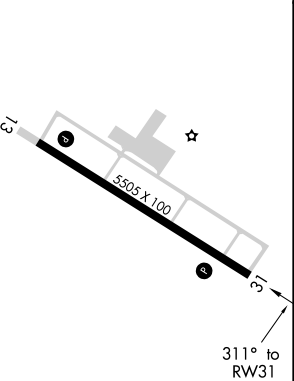

| | |
|-----------|-----------|
| ELEV 1289 | TDZE 1283 |
|-----------|-----------|



HIRL Rwy 13-31 0
REIL Rws 13 and 31 0
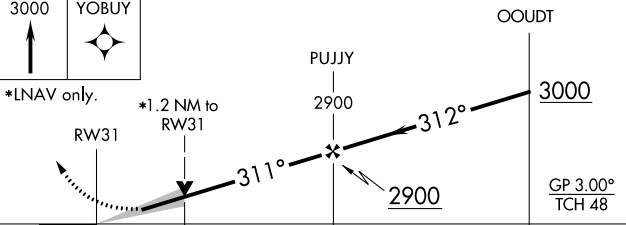
| | | | | |
|---|---|-------------|--|--|
| 3000 | YOBUY | | | |
|  |  | | | |
| *LNAV only. | | | | |
|  | | | | |
| CATEGORY | A | B | C | D |
| LPV DA | 1483- ³ / ₄ 200 (200- ³ / ₄) | | | |
| LNAV/ VNAV DA | 1635-1 ¹ / ₄ 352 (400-1 ¹ / ₄) | | | |
| LNAV MDA | 1720-1 | 437 (500-1) | 1720-1 ¹ / ₄ 437 (500-1 ¹ / ₄) | 1720-1 ¹ / ₂ 437 (500-1 ¹ / ₂) |
| CIRCLING | 1880-1 | 591 (600-1) | 1880-1 ¹ / ₂ 591 (600-1 ¹ / ₂) | 1940-2 651 (700-2) |